


## Changement de l'adresse IP du modem routeur PIRELLI A1010

- Accédez à l'interface du routeur via l'adresse **192.168.1.1**



- Saisissez « **topadmin** » comme login et mot de passe puis cliquer sur « **OK** ».

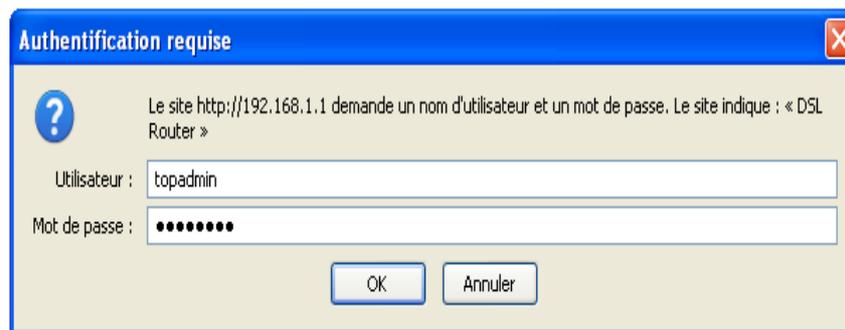

- Cliquez sur « **Advanced Setup** » puis « **LAN** ».



- Entrez l'adresse IP voulue dan le champ « IP Address ».

<b>Device Info</b>	<p><b>Local Area Network (LAN) Setup</b></p> <p>Configure the DSL Router IP Address and Subnet Mask for LAN interface. Save br configuration data and reboots the router to make the new configuration effective</p> <table border="1" style="border: 2px solid red;"> <tr> <td>IP Address:</td> <td>192.168.1.66</td> </tr> <tr> <td>Subnet Mask:</td> <td>255.255.255.0</td> </tr> </table> <p> <input type="checkbox"/> Enable IGMP Snooping  <input checked="" type="radio"/> Standard Mode  <input type="radio"/> Blocking Mode   <input type="radio"/> Disable DHCP Server  <input checked="" type="radio"/> Enable DHCP Server         </p> <table border="1"> <tr> <td>Start IP Address:</td> <td>192.168.1.67</td> </tr> <tr> <td>End IP Address:</td> <td>192.168.1.254</td> </tr> <tr> <td>Subnet Mask:</td> <td>255.255.255.0</td> </tr> <tr> <td>Leased Time (hour):</td> <td>24</td> </tr> </table>	IP Address:	192.168.1.66	Subnet Mask:	255.255.255.0	Start IP Address:	192.168.1.67	End IP Address:	192.168.1.254	Subnet Mask:	255.255.255.0	Leased Time (hour):	24
IP Address:		192.168.1.66											
Subnet Mask:		255.255.255.0											
Start IP Address:		192.168.1.67											
End IP Address:		192.168.1.254											
Subnet Mask:		255.255.255.0											
Leased Time (hour):		24											
<b>Advanced Setup</b>													
WAN													
LAN													
<b>NAT</b>													
<b>Parental Control</b>													
<b>Quality of Service</b>													
<b>Routing</b>													
<b>DNS</b>													
DSL													
<b>Diagnostics</b>													
<b>Management</b>													

- Cliquez sur « **Save/Reboot** » afin de sauvegarder les modifications effectuées.

Enable IGMP Snooping  
 Standard Mode  
 Blocking Mode  
  
 Disable DHCP Server  
 Enable DHCP Server

Start IP Address:	192.168.1.67
End IP Address:	192.168.1.254
Subnet Mask:	255.255.255.0
Leased Time (hour):	24

**Reserve IP Address**

Choose "Edit Reserved IP Address List" to configure Reserved IP Address List.  
 NOTE1: You can max reserve 10 ip address and special mac.  
 NOTE2: When you added a new reserve ip. You must reboot system to active it.

Configure the second IP Address and Subnet Mask for LAN interface