


Configuration du modem routeur SAGEM F@st 1201 V2 version 3.49Tla69_Topnet

Client particulier sous réseau IP MSAN


1. Accédez à l'interface du routeur via l'adresse **192.168.1.1**

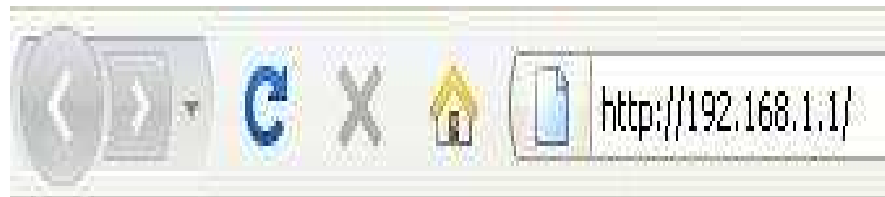

2. Saisissez « **admin** » comme login et mot de passe puis cliquez sur « **OK** ».



3. Passez sur **Advanced Setup** puis cliquez sur le bouton **Edit**.

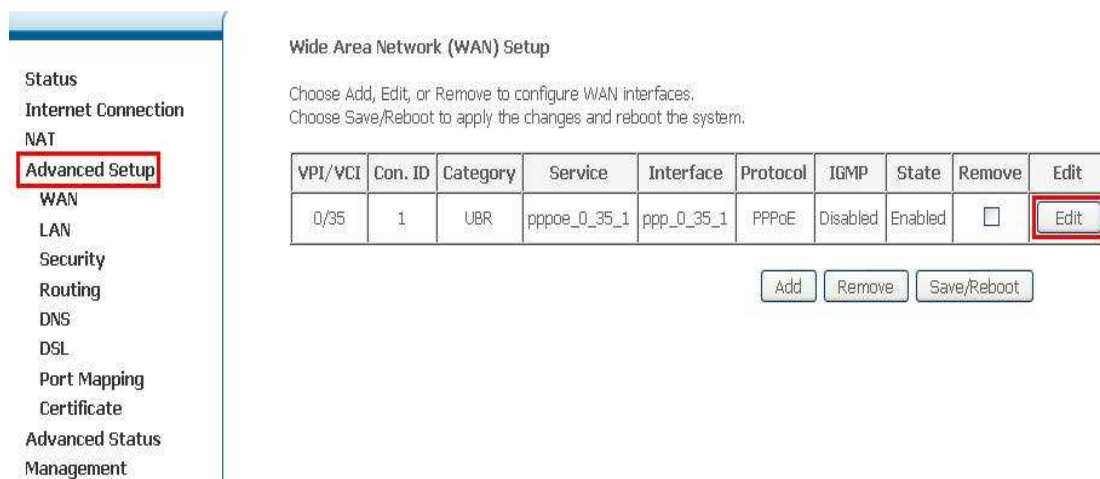


Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	Con. ID	Category	Service	Interface	Protocol	IGMP	State	Remove	Edit
0/35	1	UBR	pppoe_0_35_1	ppp_0_35_1	PPPoE	Disabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

4. Vérifiez le couple “VPI=0”/ “VCI=35”.
5. Cochez la case « **VLAN Mux-Enable Multiple Protocols Over a Single PVC** ».
6. Saisissez **410** dans le champ « **802.1Q VLAN ID** » puis cliquez sur « **Next** ».

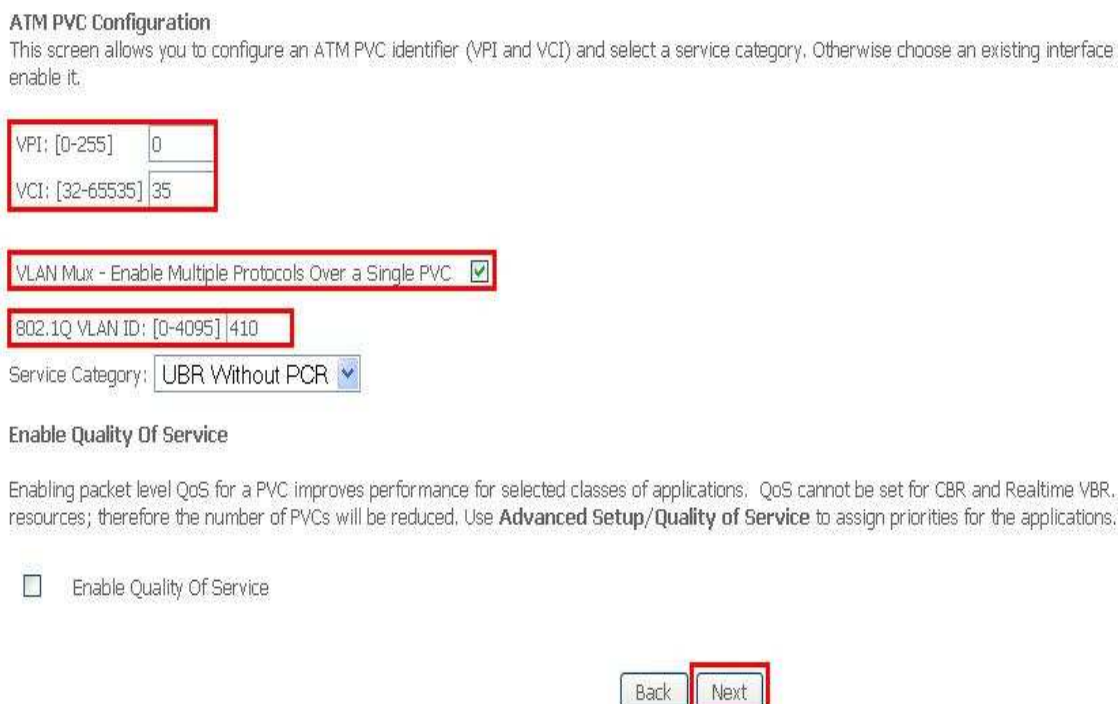

ATM PVC Configuration

This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category. Otherwise choose an existing interface enable it.

VPI: [0-255] 0
VCI: [32-65535] 35

VLAN Mux - Enable Multiple Protocols Over a Single PVC


802.1Q VLAN ID: [0-4095] 410

Service Category: UBR Without PCR

Enable Quality Of Service

Enable Quality Of Service

7. Cochez **PPP over Ethernet (PPPoE)**, vérifiez que *l'encapsulation Mode* est **LLC/SNAP-BRIDGING** puis cliquez sur **Next**.

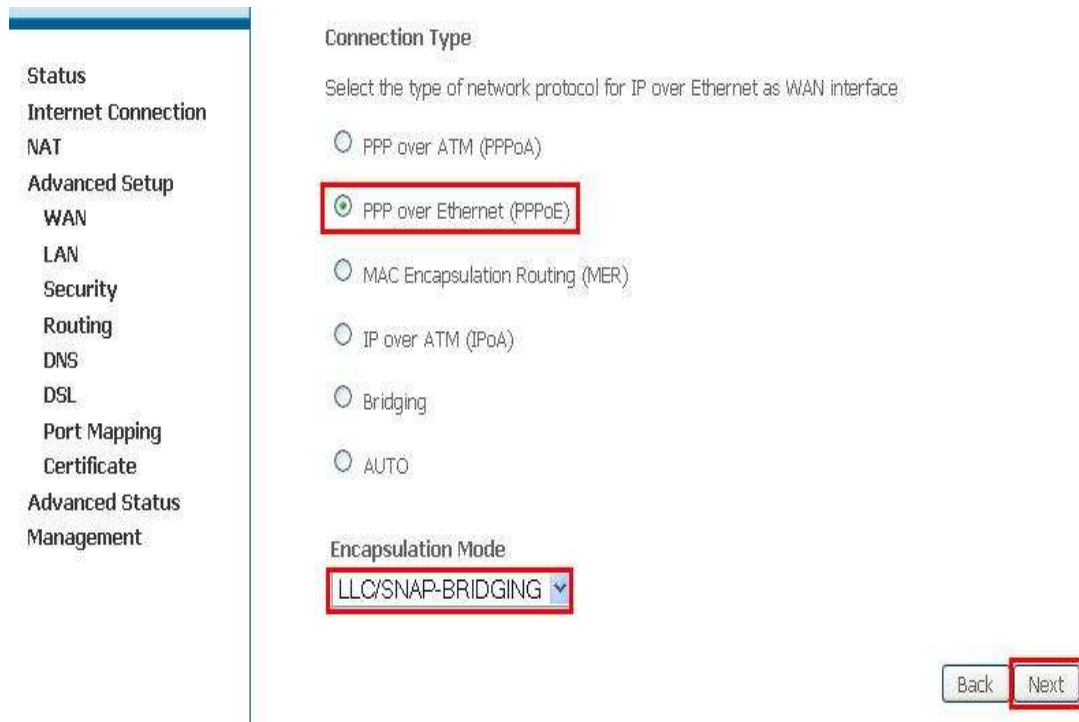

The screenshot shows a configuration page for a WAN interface. On the left is a navigation menu with the following items: Status, Internet Connection, NAT, Advanced Setup, WAN, LAN, Security, Routing, DNS, DSL, Port Mapping, Certificate, Advanced Status, and Management. The 'Advanced Setup' section is expanded, and 'WAN' is selected. The main content area is titled 'Connection Type' and contains the instruction: 'Select the type of network protocol for IP over Ethernet as WAN interface'. Below this are five radio button options: 'PPP over ATM (PPPoA)', 'PPP over Ethernet (PPPoE)', 'MAC Encapsulation Routing (MER)', 'IP over ATM (IPoA)', and 'Bridging'. The 'PPP over Ethernet (PPPoE)' option is selected and highlighted with a red box. Below the radio buttons is the 'Encapsulation Mode' section, which features a dropdown menu currently set to 'LLC/SNAP-BRIDGING', also highlighted with a red box. At the bottom right of the configuration area are two buttons: 'Back' and 'Next', with the 'Next' button highlighted by a red box.

8. Saisissez les paramètres de connexion ADSL et Cochez la case « **Retry PPP password on authentication error** » puis cliquez sur **Next**.

PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In the provided to you.

PPP Username:	user@topnet.tn
PPP Password:	●●●●●●
PPPoE Service Name:	
Authentication Method:	AUTO 

- Dial on demand (with idle timeout timer)
- PPP IP extension
- Use Static IP Address
- Retry PPP password on authentication error

Configure PPP MTU	1492
-------------------	------

- Enable PPP Debug Mode
- Bridge PPPoE Frames Between WAN and Local Ports (Default Enabled)
- Only Bridge PPPoE Frames(Default Enabled)
- Stop when the username is empty

Back **Next**

9. Cochez **Enable NAT** et **Enable Firewall** puis cliquez sur **Next**.

Network Address Translation Settings

Network Address Translation (NAT) allows you to share one Wide Area Network (WAN) IP address for m

Enable NAT	<input checked="" type="checkbox"/>
Enable Firewall	<input checked="" type="checkbox"/>

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast

Enable WAN Service

Service Name

Back	Next
------	------

10. Cliquez sur **Save**.

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP,

VPI / VCI:	0 / 35
Connection Type:	PPPoE
Service Name:	pppoe_0_35_1
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.

NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

Back	Save
------	------

11. Cliquez sur "Save/Reboot".

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

VPI / VCI:	0 / 35
Connection Type:	PPPoE
Service Name:	pppoe_0_35_1
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.

NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

12. Patientez **60 secondes** afin de finaliser la configuration.

DSL Router Reboot

The DSL Router has been configured and is rebooting.

Close the DSL Router Configuration window and wait for **56** second(s) before reopening your web browser. If necessary, reconfigure your IP address to match your configuration.